

RTS

DV 4350

Portable Series

Durable design, Rock Solid, easy to operate

Working frequency 400~470 MHz 16 channels

2 Watts UHF RF output

In-built VOX function, hands-free talking

Prior scanning, in-time answer for multi-channel

In-built CTCSS / DCS functions

BCLO

Scratch resistant

Die Cast aluminum enclosure designed for rugged outdoor use

Repeater frequency facility

Battery save function that increases battery autonomy

With 1500mAh Li-ON battery, 8Hrs for talking duration



Uses Flash memory E² prom

IP 54 - water & dust

MIL - STD 810 C, D&E

x 400~470MHz

Standard Accessories

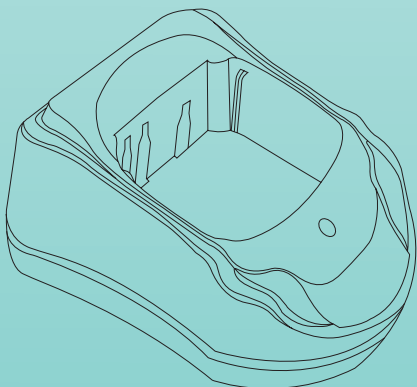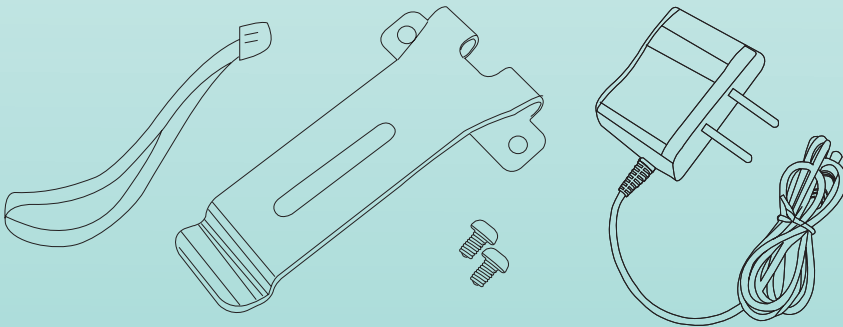



DV 4350 Portable Series

General	
RX and TX Frequency Range	400~470 MHz
Frequency Control	PLL
Frequency Stability	5ppm
Channel Number	16
Channel Spacing	25 / 12.5 KHz
Power Supply	DC 7.4 V 11.8WH (1200mA)
Squelch Method	Carrier wave, CTCSS, DCS
Usable Temperature Range	-10°C ~ +60°C
Louder speaker	500 mW
Dimension	117(H) x 36(D) x 60(W) mm
Weight	250 grams

Transmitter	
Output power	2/0.5 UHF Watts
TX Current	< 1 Amp 2 watts
Modulation	FM
Audio Distortion	<5%
Audio Response	300~3000Hz(+1,-3dB)6dB/Oct
FM Noise	-40dB/12.5KHz
Harmonic	<-60dB
Max. Deviation	2.5KHz
Adjacent Channel Power	<-60dBc/12.5KHz
Start Time	<70m Sec
Time-out Timer	0-240Sec

Receiver	
Sensitivity	0.25uV(12dB SINAD EIA) 0.5uV (20dB SINAD ETS)typical
Audio Response	300-3000Hz(+1,-3dB) 6dB/Oct
Audio Power output	> 500mW @10%
FM Noise	-40dB/12.5KHz
Selectivity	>60dB/12.5KHz
Intermodulation	>60dB
spurious Rejection	>70dB

Specifications are subject to change without notice due to advancements in technology.

RTS (Repeater & Trunking Systems)
7 Charl Cilliers Street, Senekal, Free State
South Africa

Tel: 086 100 2525 Fax: 086 659 9504

Website: www.repeater.co.za

Your local Dealer